
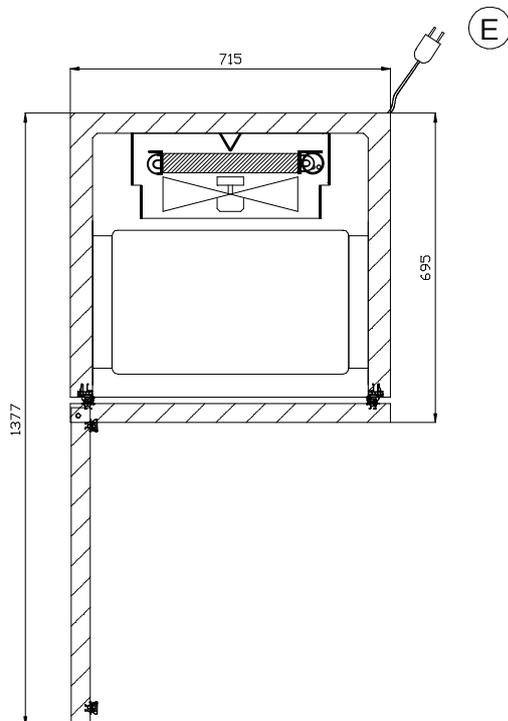
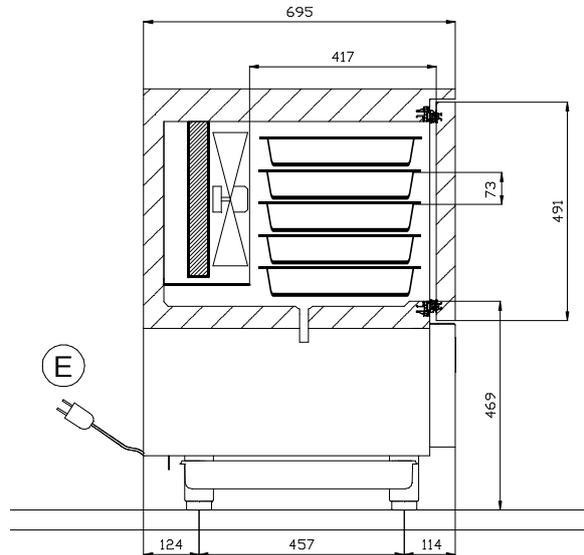


Technical data	S
Cooling capacity (Evap. -10°C / Cond. 45°C)	1380 W
Condensation	self-contained air
Refrigerant gas	R290
GWP	3
Climate class	4
Power supply (Ph / Volts / Hz)	220-240/1N/50
Max. power consumption cold cycles	870 W - 5,14 A
Blast chilling (+90 °C, +3 °C)	18 kg
Shock freezing (+90°C, -18°C)	12 kg
Internal dimensions (wxpxh)	615 x 417 x 405 mm
External dimensions (wxpxh)	715 x 695 x 947 mm
Capacity (liter)	104 L
Packaging dimensions	730 x 755 x 1090 mm
Packing volume	0.6 m ³
Gross weight	109 kg

EN22042					
+65°C +10°C	kWh/Kg	0,092	+65°C -18°C	kWh/Kg	0,312
	Min.	98		Min.	258
	Kg	13		Kg	7




GASTRONOMIA / GASTRONOMY

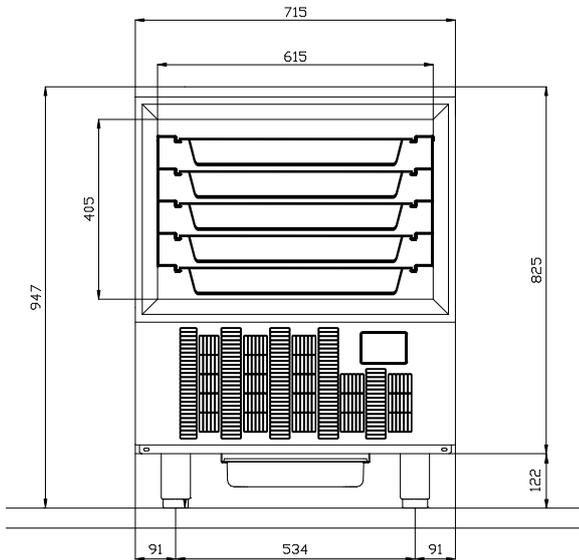

 H MIN 120 mm
H MAX 165 mm

 CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION





PASTICCERIA / PASTRY

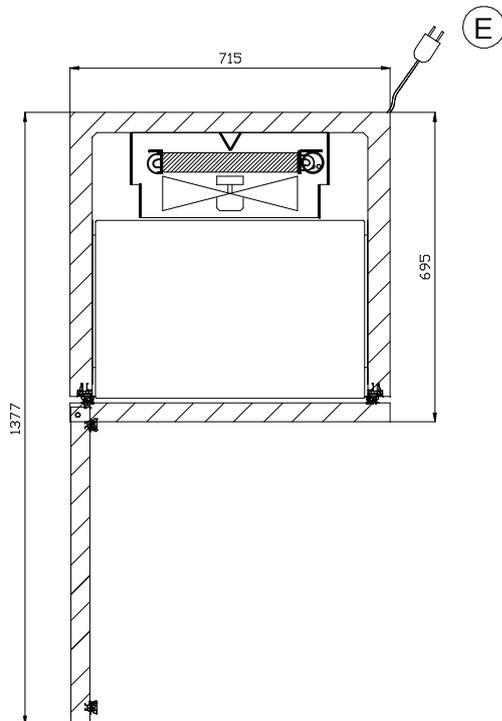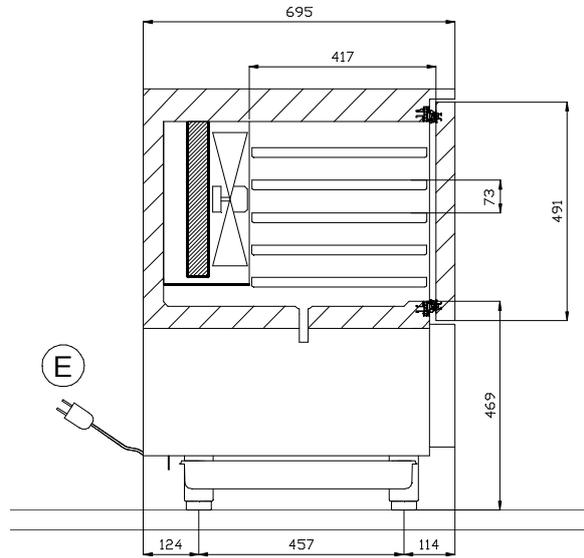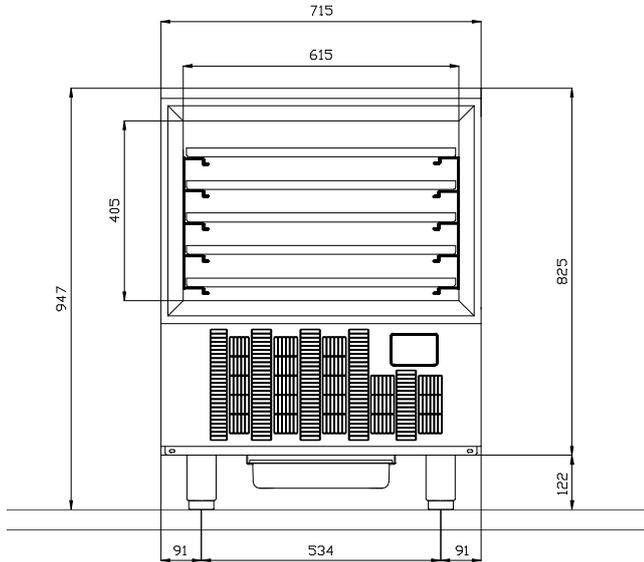

 H MIN 120 mm
H MAX 165 mm

 CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION

GELATO / ICE CREAM

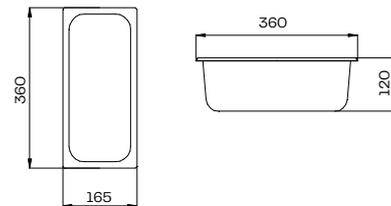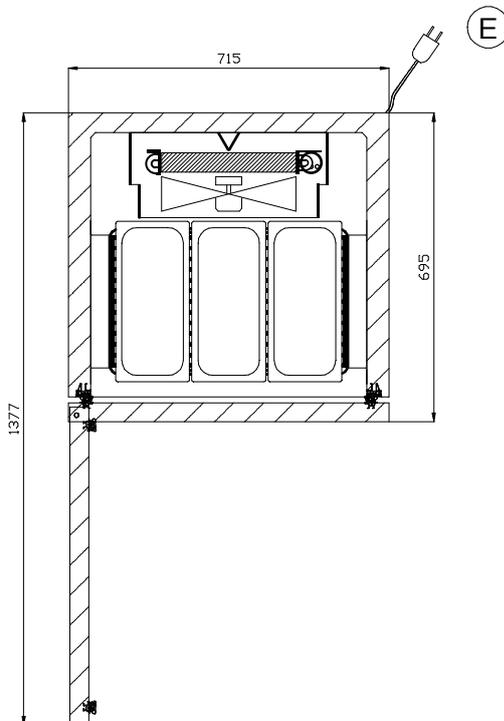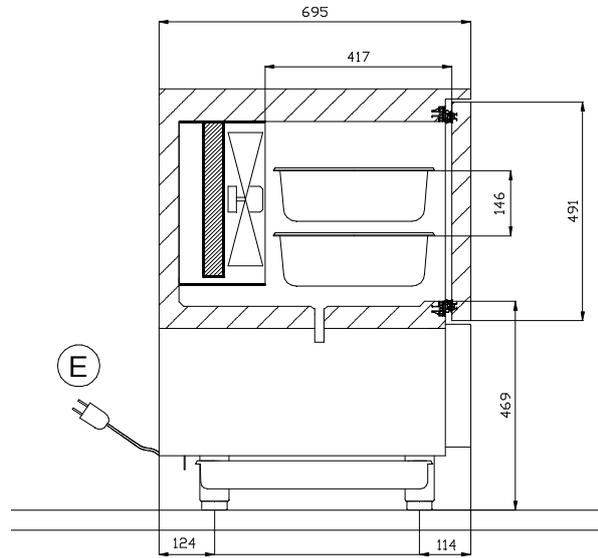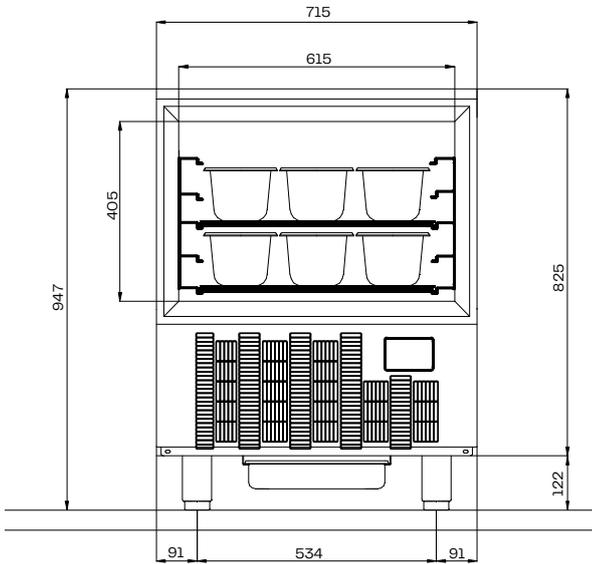

 H MIN 120 mm
 H MAX 165 mm

 CONNESSIONE ELETTRICA
 ELECTRICAL CONNECTION